

TRIM PROTECTOR BARS


Solutions to Door and Trim Damage

Choosing the correct protection bar:

1. Determine traffic - light to moderate use = SD Series, heavy use = HD Series
2. Measure projections - of exit device, door knob, etc.
3. Review product dimensions - to match bar to your specific needs.



Warning: do not locate protection bars where they can impede operation of exit devices.

How They Work

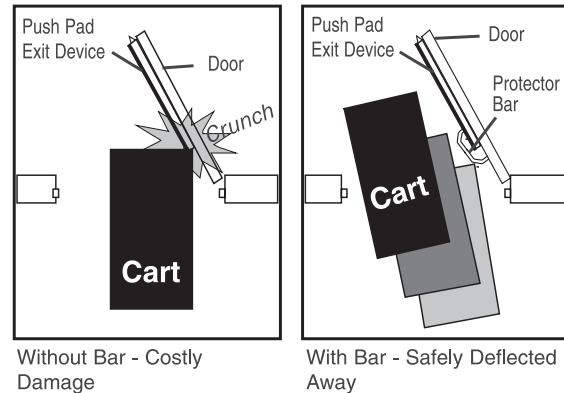


SD Series: Models 230, 240, 250

1. Position protection bar so that traffic will be deflected away, clearing the exit device.
2. Mark screw holes.
3. Drill 5/16" holes for #10-24 sex bolts.
4. Mount bar.

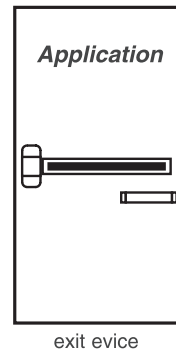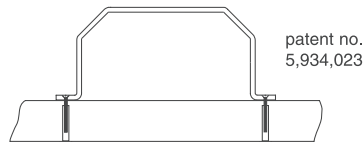


SD Series: Model 260

1. Position protection bar so that traffic will be deflected away, clearing the exit device, lever, knob, etc.
2. Mark screw holes.
3. Drill 5/16" holes for #10-24 sex bolts.
4. Mount bar.



Not To Scale

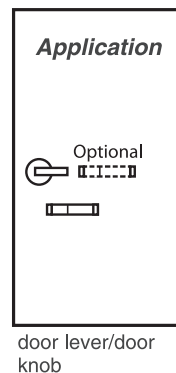

Continued...

INSTALLATION INSTRUCTION SD230-09

Effective date: January 1, 2009
Supercedes: All Previous

McKinney®

ASSA ABLOY



INSTALLATION INSTRUCTION SD230-09

TRIM PROTECTOR BARS

HD & M Series: Models 230, 240, 250

1. Position protection bar so traffic will be deflected away, clearing the exit device.
2. Mark center to center for screw holes.
3. Drill $\frac{5}{16}$ " holes for $\frac{1}{4}$ -20 thru bolt machine screws.
4. Mount bar.

patent no.
5,934,023




exit device


HD Series: Models TPB01, TPB02, TPB03, TPB04, TPB05

1. Position protection bar so traffic will be deflected away, clearing the exit device, lever, knob, etc.
2. Mark center to center for screw holes.
3. Drill $\frac{5}{16}$ " holes for $\frac{1}{4}$ -20 thru bolt machine screws.
4. Mount bar.


patent no.
4,095,372



Models R101LPB, R111LPB &
R115LPB



Models R102LPB, R112LPB
(with reinforcing bar)





Optional
door lever/door
knob

HD Series: Models EDP16, EDP17

1. Remove exit device from door.
2. Field cut hinge end of exit device as needed to mount exit device protector (EDP).
EDP should be centered over exit device and spaced $\frac{1}{4}$ " minimum from touch pad.
3. Reinstall exit device on door by drilling new holes for mounting bracket.
4. Position EDP over device and mark center to center for screw holes
5. Drill $\frac{5}{16}$ " holes for $\frac{1}{4}$ -20 thru bolts.
6. Mount EDP.

patent no.
5,867,941



exit device